



Socket no.: **65**  
 Terminal type: **SOLDER**  
 Mounting: **PCB**

Also suitable for



**OVERVIEW**

- PCB-mount
- Sturdy construction
- Excellent contact pressure on relay terminals
- No internal soldering
- No maintenance
- Provision for fitment of keying pins
- Provision for fitment of retaining clip

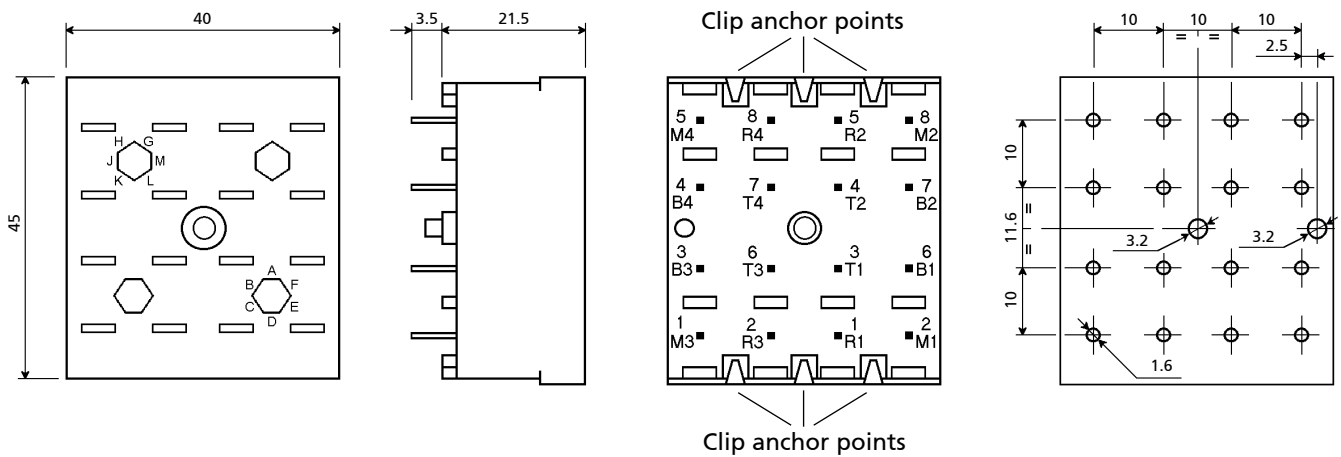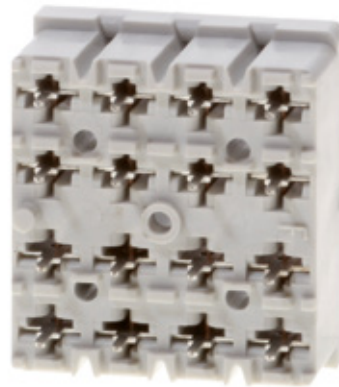

**Specifications**

Weight: 51 g  
 Operating temperature: -25°C...+70°C  
 Storage temperature: -40°C...+85°C  
 Dielectric strength: 2.5kV 50Hz 1min.

Type and size of terminals: solder, 1.6mm  
 Fire resistance: EN60695-2-1, UL94 - V0, EN45545-2, NFPA130  
 Standards: EN60255, EN60947, EN 61810, EN61373