

OVERVIEW

- Connection of cable with faston clip
- Panel mounting
- Sturdy construction
- No internal soldering
- Snap-in relay (PRDC081)
- Provision for fitment of retaining clip (PRDG161)
- Provision for fitment of keying pins
- Protection IP10



PRDC081




Detail of connections



PRDG161



Detail of connections

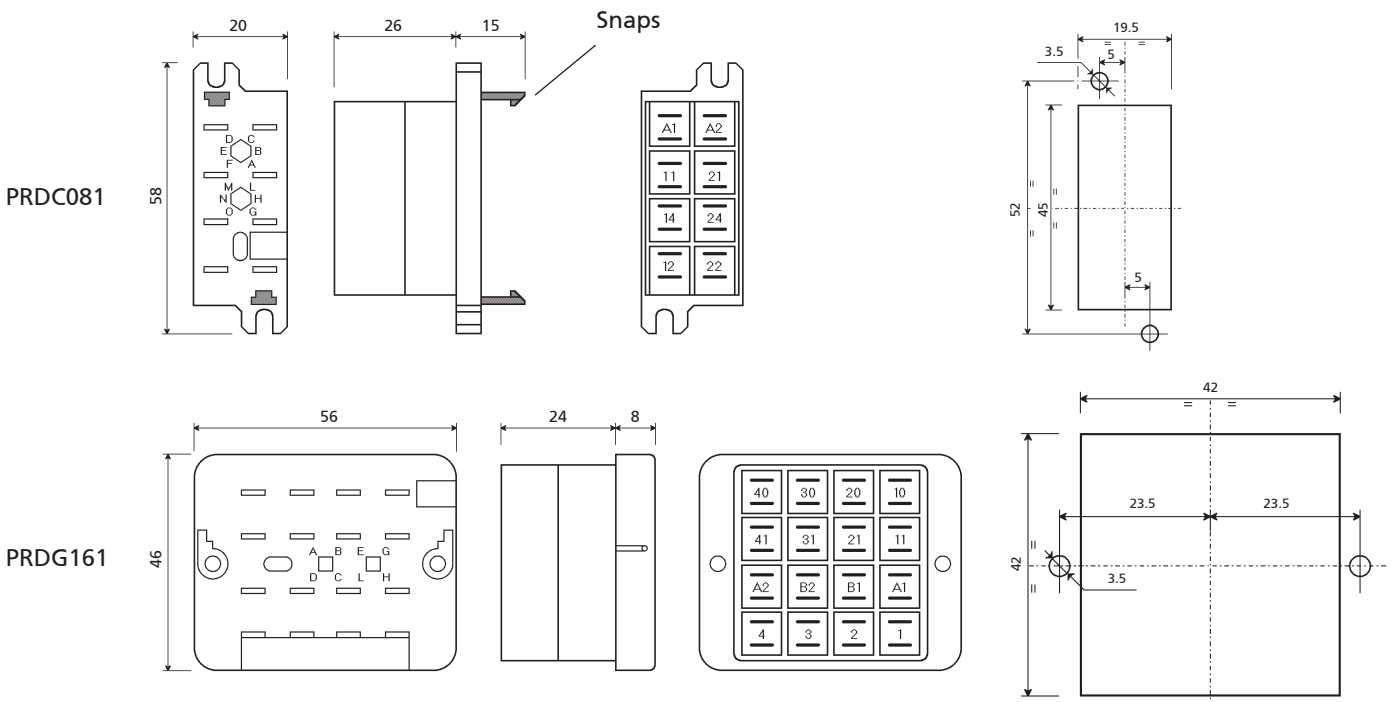

Specifications

Weight: 28 / 69 g

Operating temperature: -25°C...+55°C

Storage temperature: -40°C...+70°C

Panel mounting:

- \varnothing holes: 3.5mm

Degree of protection: IP10

Dielectric strength: 2.5kV 50Hz 1min

Type and size of faston clip: 2 x 4.8 x 0.8

Width of slot: PRDC081 : 7.3 mm

PRDG161: 7.8 mm

Maximum section of cable: 2 x 2.5 mm²

Fire resistance: EN60695-2-1, UL94 - V0

Standards: EN60255, EN60947, EN 61810