



SERIES

CONNECTION: **REAR**  
TERMINAL TYPE: **SCREW**  
MOUNTING: **PANEL**

SUITABLE FOR




Rolling  
stock

## OVERVIEW


- Cable secured with removable screws
- Panel mounting
- Sturdy construction
- Excellent contact pressure on relay terminals
- No internal soldering

- Inputs for maximum section 2.5 mm<sup>2</sup>
- Provision for fitment of keying pins
- Provision for fitment of retaining clip
- Protection IP10


## MODELS

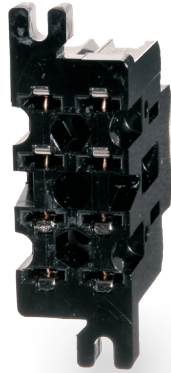


53IL

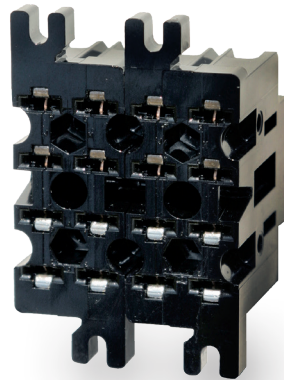



43IL

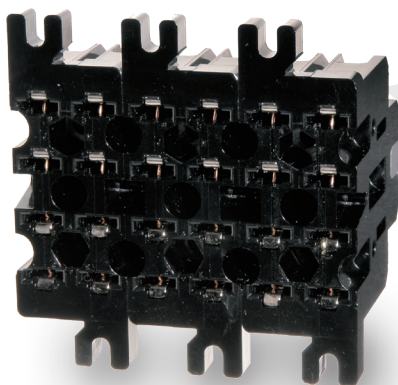

73IL

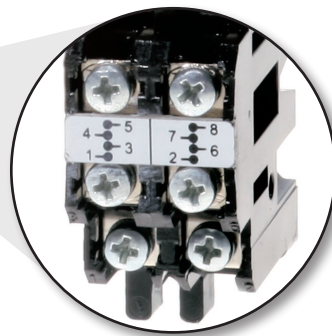

Detail of connections

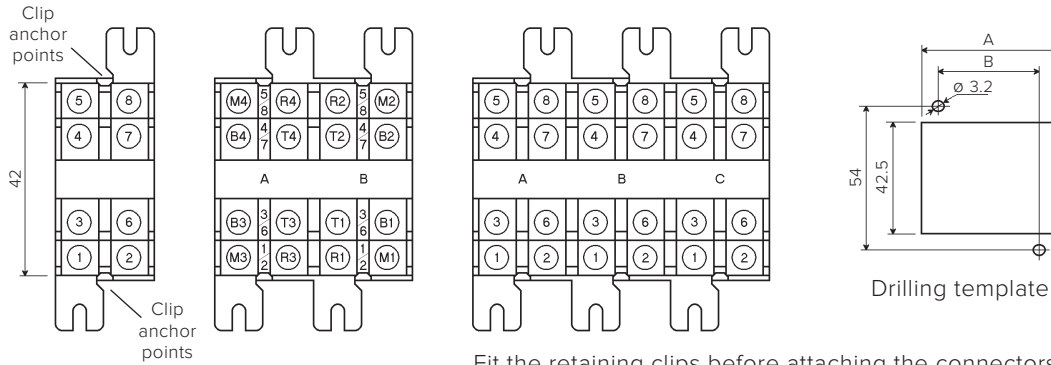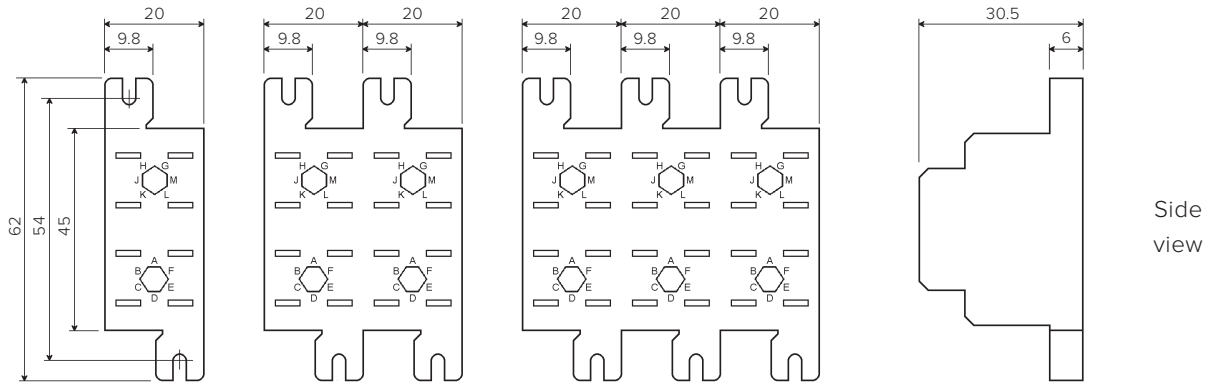

	A	B
53IL	20.5	10
43IL	40.5	30
73IL	60.5	50

Fit the retaining clips before attaching the connectors

## SPECIFICATIONS

**Weight:** 41 / 82 / 123 g  
**Operating temperature:** -25°C...+70°C  
**Storage temperature:** -40°C...+85°C  
**Degree of protection:** IP10  
**Dielectric strenght:** 2.5 kV 50 Hz for 1 min

**Type and size screw:** M3 thread, cross head  
 Removable screw for use with eyelet terminals  
**Tightening torque:** 0.5...0.8 Nm  
**Width of slot:** 8 mm  
**Maximum section of cable:** 2 x 2.5 mm<sup>2</sup>  
**Fire resistance:** EN60695-2-1, UL94 - V0, EN45545-2  
**Standards:** EN60255, EN60947, EN61810, EN61373